

DT-1162S, DT-1136S, DT-1128S

Economical edge sander model series

- Maximum diameter of cut
DT-1162S: Ø62"
DT-1136S: Ø36"
DT-1128S: Ø28"
- Single table
- Single cutterhead




Sanding belt size 5" x 71"
Sanding belt speed (2 speeds)..... 400 / 870 M/min
Sanding belt drive motor..... 2 HP
Contact wheel diameter..... 110 mm dia.
Sanding head vertical adjustment..... 30 mm
Spindle diameter..... 1" dia.

SPECIFICATIONS:

MODEL	DT-1162S	DT-1136S	DT-1128S
Range of cutting diameter	10"-62"	4"-36"	4"-28"
Range of sanding diameter	16"-62"	8"-36"	6"-28"
Maximum rectangular cutting (2:1)	55.2" x 27.6"	32" x 16"	25" x 12.5"
Table diameter	46"	26"	18"
Table rotation speed (Auto variable)	1-3 RPM	1.5-4 RPM	1.5-4 RPM
Spindle speed	9000 RPM	8000 RPM	8000 RPM
Spindle diameter	1", 30 mm, 1-1/4"	1", 30 mm, 1-1/4"	1", 30 mm, 1-1/4"
Cutter size	100 mm	100 mm	100 mm
Follower roller diameter	100 mm	100 mm	100 mm
Table drive motor	2 HP	1 HP	1 HP
Spindle drive motor	10 HP x 1	7-1/2 HP x 1	7-1/2 HP x 1
Sanding belt size	5" x 71"	5" x 71"	5" x 71"
Net weight	1500 kgs	970 kgs	840 kgs
Gross weight	1970 kgs	1220 kgs	1050 kgs
Packing size	92" x 85" x 80"	88" x 76" x 77"	80" x 68" x 77"

All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.

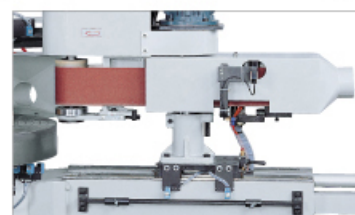

EDGE SANDING ATTACHMENT

Designed and engineered for efficient, highly productive and time saving performance, the EXCELLENT edge sanding attachment, used with a copy shaper, provides a perfect finish for chair legs, table tops, and other curved edge furniture components. With this attachment, flat, curved and intricate profiles can be easily sanded after shaping, reducing the handling time for sanding operations and increasing the efficiency of your production.