

# DT-1272, DT-1262

Continuous multi-station working...

High production capability!




- Maximum diameter of cut  
DT-1272: Ø72"  
DT-1262: Ø62"
- Single table
- Double cutterhead

## SPECIFICATIONS:

MODEL	DT-1272	DT-1262
Range of cutting diameter	10'-72"	10'-62"
Maximum rectangular cutting (2:1)	64.2" x 32.1"	55.2" x 27.6"
Table diameter	46"	46"
Table rotation speed (Auto variable)	1-3 RPM	1-3 RPM
Spindle speed	9000 RPM	9000 RPM
Spindle diameter (Interchangeable)	1", 30 mm, 1-1/4" (One dia furnished)	1", 30 mm, 1-1/4" (One dia furnished)
Cutter size	100 mm	100 mm
Follower roller diameter	100 mm	100 mm
Table drive motor	2 HP x 1	2 HP x 1
Spindle drive motor	10 HP x 2	10 HP x 2
Net weight	1700 kgs	1600 kgs
Gross weight	2200 kgs	2050 kgs
Packing size	112" x 89" x 80"	88" x 83" x 80"

All specifications, dimensions and design characteristics shown in this catalogue are subject to change without notice.

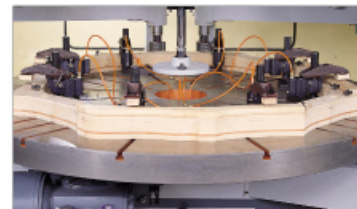

## CLAMPING SYSTEM

- Models over 80" cutting capacity are furnished with 8pcs of automatic air clamps as standard to permit multi-station working.
- A center clamp is also provided for single station working.
- Increased number of automatic air clamps is optional.
- Models with less than 80" cutting capacity are not supplied with automatic air clamp.